

centrix

SMART EVOLUTION
IP VIRTUE SERIES

Be Alert, Be Aware,
Be Vigilant.



IP CAMERA

1080P CAMERA	3 - 6
5MP CAMERA	7
4K(8MP) CAMERA	8
FISHEYE & PTZ CAMERA	9 - 12

NETWORK RECORDER

VIRTUE RECORDER	13 - 17
HYBRID RECORDER	18

SMART IP CAMERA

All H.265 Series support



FACE DETECTION

Face Detection detects people faces and trigger alarm. It reduce false alarm triggered by motion detection that detects all moving objects, including trees or animals.




INTRUSION DETECTION

Intrusion detection detects objects move into area that are configured beforehand. The area that are preset are considered as no entry area and trigger an alarm or notification to user once action.



CROSS DETECTION

Cross detection detects objects move crossing line that are configured beforehand. The cross line that are preset will trigger an alarm or notification to user once action.

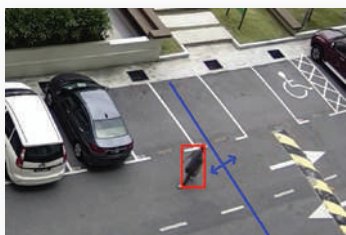

PEOPLE COUNTING

Count entry and exit numbers of people




SMART IP CAMERA

All H.265 Series support




HEAT MAP

Heat Map detects the point of people's gathering. This is great for analysing the pattern of movement to see where is the point that people always gather which helps in a better product placing/arrangement.

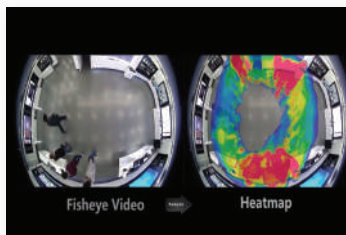


MISSING OBJECT

Monitor all the items under supervision and alert once these items are being removed involuntarily.

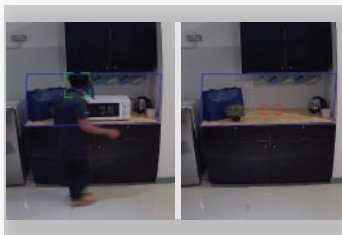


ABANDON OBJECT

Monitoring the area and alert for any objects being left behind for a period of time.

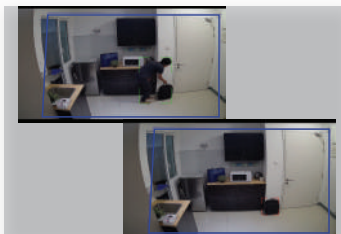

FACE RECOGNITION

Monitor all the faces that transact within the area and pop up an alarm if there is a blacklisted person detected.

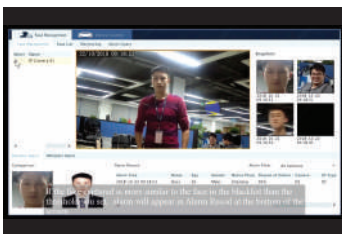




IR 1080P

D25L-28

IR DOME CAMERA

- 1/2.7", 2 MEGAPIXEL, PROGRESSIVE SCAN, CMOS
- 2.8MM@F1.6 ANGLE OF VIEW(H): 112.7°
- HD 1920 x 1080
- H.265+, H.265, H.264, MJPEG
- UP TO 30M (98 FT) IR DISTANCE
- 2D/3D DNR
- TRIPLE STREAMS
- 2-AXIS
- IP67
- IK10



IR 1080P WP

W25L-40

IR WEATHERPROOF CAMERA

- 1/2.7", 2 MEGAPIXEL, PROGRESSIVE SCAN, CMOS
- 4.0MM@F1.8 ANGLE OF VIEW(H): 86.5°
- HD 1920 x 1080
- H.265+, H.265, H.264, MJPEG
- UP TO 30M (98 FT) IR DISTANCE
- IR ANTI-REFLECTION WINDOW
- 2D/3D DNR
- TRIPLE STREAMS
- IP67



IR 1080P T-WDR

D25S-28

IR DOME CAMERA

- 1/2.8", 2 MEGAPIXEL, PROGRESSIVE SCAN, CMOS
- STARLIGHT ILLUMINATION
- 2.8MM@F1.6 ANGLE OF VIEW(H) 107.8°
- HD 1920 x 1080
- H.265+, H.265, H.264, MJPEG
- UP TO 30M (98 FT) IR DISTANCE
- UP TO 120DB WDR
- 2D/3D DNR
- TRIPLE STREAMS
- 3-AXIS
- IP67
- IK10



IR 1080P T-WDR WP

W25S-40

IR WEATHERPROOF CAMERA

- 1/2.8, 2 MEGAPIXEL, PROGRESSIVE SCAN, CMOS
- STARLIGHT ILLUMINATION
- 4.0MM@F1.6 ANGLE OF VIEW(H): 82°
- HD 1920 x 1080
- H.265+, H.265, H.264, MJPEG
- UP TO 30M (98 FT) IR DISTANCE
- IR ANTI-REFLECTION WINDOW
- 2D/3D DNR
- TRIPLE STREAMS
- IP67



IR 1080P

D25-2812M IR DOME CAMERA

- 1/2.8", 2.0 MEGAPIXEL, PROGRESSIVE SCAN, CMOS
- 2.8-12 MM@F1.6 ANGLE OF VIEW(H): 90°
- HD 1920 x 1080
- MOTORIZED LENS
- H.265+, H.265, H.264, MJPEG
- UP TO 30M (98 FT) IR DISTANCE
- TRIPLE STREAMS
- TRUE WDR
- ALARM & AUDIO IN/OUT
- SUPPORTT MICRO SD
- BUILT-IN POE DC 12V SPLITTER
- 4K SURGE PROTECTION
- IP67, IK10



IR 1080P WP

W25-2812M IR WEATHERPROOF CAMERA

- 1/2.8", 2.0 MEGAPIXEL, PROGRESSIVE SCAN, CMOS
- 2.8-12 MM@F1.6 ANGLE OF VIEW(H): 90°
- HD 1920 x 1080
- MOTORIZED LENS
- H.265+, H.265, H.264, MJPEG
- UP TO 30M (98 FT) IR DISTANCE
- TRIPLE STREAMS
- TRUE WDR
- ALARM & AUDIO IN/OUT
- SUPPORTT MICRO SD
- IR ANTI-REFLECTION WINDOW
- IP67, IK10



IR 1080P

D25L-2812 IR DOME CAMERA

- 1/2.7", 2.0 MEGAPIXEL, PROGRESSIVE SCAN, CMOS
- 2.8-12 MM@F1.6 ANGLE OF VIEW(H): 90°
- HD 1920 x 1080
- MOTORIZED LENS
- H.265+, H.265, H.264, MJPEG
- UP TO 30M (98 FT) IR DISTANCE
- IR ANTI-REFLECTION WINDOW
- 2D/3D DNR
- SUPPORTT MICRO SD
- 3-AXIS
- IP67, IK10



IR 1080P T-WDR WP

W25L-2812 IR WEATHERPROOF CAMERA

- 1/2.7", 2.0 MEGAPIXEL, PROGRESSIVE SCAN, CMOS
- STARLIGHT ILLUMINATION
- 2.8-12 MM@F1.6
- HD 1920 x 1080
- H.265+, H.265, H.264, MJPEG
- UP TO 30M (98 FT) IR DISTANCE
- IR ANTI-REFLECTION WINDOW
- 2D/3D DNR
- TRIPLE STREAMS
- IP67
- IK10



IR 5MP T-WDR

D55S-28

IR DOME CAMERA

- 1/2.7", 5.0 MEGAPIXEL, PROGRESSIVE SCAN, CMOS
- STARLIGHT ILLUMINATION
- 2.8 MM@F1.8
- HD 2592 x 1944
- H.265+, H.265, H.264, MJPEG
- UP TO 30M (98 FT) IR DISTANCE
- 2D/3D DNR
- TRUE WDR
- ALARM & AUDIO IN/OUT
- SUPPORT MICRO SD
- IP67, IK10



IR 5MP WP T-WDR

W55S-40

IR WEATHERPROOF CAMERA

- 1/2.7", 5.0 MEGAPIXEL, PROGRESSIVE SCAN, CMOS
- STARLIGHT ILLUMINATION
- 4.0 MM@F1.8
- HD 2592 x 1944
- H.265+, H.265, H.264, MJPEG
- UP TO 30M (98 FT) IR DISTANCE
- IR ANTI-REFLECTION WINDOW
- 2D/3D DNR
- TRUE WDR
- ALARM & AUDIO IN/OUT
- IP67



IR 5MP T-WDR

D55S-2713M

IR DOME CAMERA

- 1/2.7", 5.0 MEGAPIXEL, PROGRESSIVE SCAN, CMOS
- STARLIGHT ILLUMINATION
- 2.7-13.5 MM@F1.6, MOTORIZED LENS
- HD 2592 x 1944
- H.265+, H.265, H.264, MJPEG
- UP TO 30M (98 FT) IR DISTANCE
- 2D/3D DNR
- TRUE WDR
- ALARM & AUDIO IN/OUT
- SUPPORT MICRO SD
- IP67, IK10



IR 5MP T-WDR WP

W55S-2713M

IR WEATHERPROOF CAMERA

- 1/2.7", 5.0 MEGAPIXEL, PROGRESSIVE SCAN, CMOS
- STARLIGHT ILLUMINATION
- 2.7-13.5 MM@F1.2, MOTORIZED LENS
- HD 2592 x 1944
- H.265+, H.265, H.264, MJPEG
- UP TO 30M (98 FT) IR DISTANCE
- 2D/3D DNR
- TRUE WDR
- ALARM & AUDIO IN/OUT
- SUPPORT MICRO SD
- 9:16 CORRIDOR MODE
- IP67, IK10



IR 8MP 4K T-WDR

D85S-28

IR DOME CAMERA

- 1/2.5", 8.0 MEGAPIXEL, PROGRESSIVE SCAN, CMOS
- STARLIGHT ILLUMINATION
- 2.8 MM@F2.0 ANGLE OF VIEW(H): 91.6°
- HD 3840 x 2160
- H.265+, H.265, H.264, MJPEG
- UP TO 30M (98 FT) IR DISTANCE
- TRIPLE STREAMS
- 2D/3D DNR
- TRUE WDR
- IP67



IR 8MP 4K WP T-WDR

W85S-40

IR WEATHERPROOF CAMERA

- 1/2.5", 8.0 MEGAPIXEL, PROGRESSIVE SCAN, CMOS
- STARLIGHT ILLUMINATION
- 4.0 MM@F2.0 ANGLE OF VIEW(H): 91.6°
- HD 3840 x 2160
- H.265+, H.265, H.264, MJPEG
- UP TO 30M (98 FT) IR DISTANCE
- IR ANTI-REFLECTION WINDOW
- TRIPLE STREAMS
- 2D/3D DNR
- TRUE WDR
- IP67



IR 8MP 4K T-WDR

D85S-2812M

IR DOME CAMERA

- 1/2", 8.0 MEGAPIXEL, PROGRESSIVE SCAN, CMOS
- STARLIGHT ILLUMINATION
- 2.8-12 MM@F1.6, MOTORIZED LENS
- HD 3840 x 2160
- H.265+, H.265, H.264, MJPEG
- UP TO 30M (98 FT) IR DISTANCE
- 2D/3D DNR
- TRUE WDR
- ALARM & AUDIO IN/OUT
- SUPPORT MICRO SD
- BUILT-IN POE DC 12V SPLITTER
- IP67, IK10



IR 8MP 4K T-WDR WP

W85S-2812M

IR WEATHERPROOF CAMERA

- 1/2", 8.0 MEGAPIXEL, PROGRESSIVE SCAN, CMOS
- STARLIGHT ILLUMINATION
- 2.8-12 MM@F1.6, MOTORIZED LENS
- HD 3840 x 2160
- H.265+, H.265, H.264, MJPEG
- UP TO 30M (98 FT) IR DISTANCE
- IR ANTI-REFLECTION WINDOW
- 2D/3D DNR
- TRUE WDR
- ALARM & AUDIO IN/OUT
- SUPPORT MICRO SD
- BUILT-IN POE DC 12V SPLITTER
- IP67, IK10



IR 5MP T-WDR

Q55

FISHEYE CAMERA

- 1/2.8", 5.0 MEGAPIXEL, PROGRESSIVE SCAN, CMOS
- 1.4 MM@F2.0 ANGLE OF VIEW : 360°
- ULTRA WIDE ANGLE LENS 360° PANORAMIC IMAGE
- HD 2592x1944
- H.265+, H.265, H.264, MJPEG
- UP TO 10M (33 FT) IR DISTANCE
- BUILT-IN OMNIDIRECTIONAL MICROPHONE
- TRIPLE STREAM (3 PANORAMIC VIEW)
- SUPPORT MICRO SD
- IP67
- IK10



IR 2MP T-WDR

Q85

FISHEYE CAMERA

- 1/1.7", 12.0 MEGAPIXEL, PROGRESSIVE SCAN, CMOS
- 1.8 MM@F2.4 ANGLE OF VIEW : 360°
- ULTRA WIDE ANGLE LENS 360° PANORAMIC IMAGE
- HD 4000 x 3000
- H.265+, H.265, H.264, MJPEG
- UP TO 10M (33 FT) IR DISTANCE
- BUILT-IN OMNIDIRECTIONAL MICROPHONE
- TRIPLE STREAM (3 PANORAMIC VIEW)
- SUPPORT MICRO SD
- IP67
- IK10

PTZ CAMERA

Footage Enhancement



RESOLUTION

Ultra High image resolution from 2MP and can reach up to 4K depending on PTZ model. Details on footage that are digitally zoomed usually will lose most of the details with camera with less resolution but not with latest centrix PTZ cameras.




ULTRA ZOOM

5-220mm camera module zoom can reach up to 44x.




STARLIGHT

Ultra low light capture made possible by using latest starvis chipset from Sony. Capture image color image details in lighting condition as low as 0.002 lux.

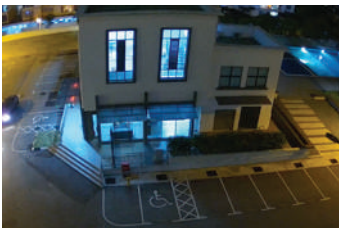

PEOPLE TRACKING

Keep track of any prohibited movement with a zoomed image to provide clarity of the people that is being tracked.

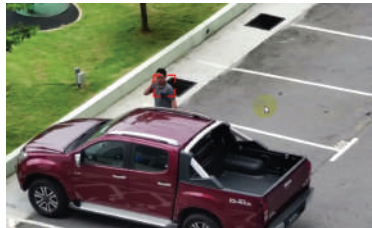



SI25P-5X

INDOOR MINI PTZ CAMERA

- 1/2.9", 2.0 MEGAPIXEL, PROGRESSIVE SCAN, CMOS
- 2.7~13.5mm@ AF, MOTORIZED ZOOM LENS
- 5X OPTICAL ZOOM
- HD 1920x1080
- SMART IR UP TO 30M
- H.265+, H.265, H.264
- TRIPLE STREAMS
- BUILT-IN MICROPHONE
- SUPPORT MICRO SD 256GB
- SUPPORT POE POWER SUPPLY



SI25S-22X

INDOOR IR PTZ CAMERA


- 1/2.8", 2.0 MEGAPIXEL, PROGRESSIVE SCAN, CMOS
- STARLIGHT ILLUMINATION
- 5.2~114.4MM@ AF, MOTORIZED ZOOM LENS
- 22X OPTICAL ZOOM
- HD 1956 x 1266
- H.265+, H.265, H.264
- TRIPLE STREAMS
- FAST FOCUSING
- SUPPORT MICRO SD
- IP65
- IK10



SE25-22X

OUTDOOR IR PTZ CAMERA

- 1/2.9", 2.0 MEGAPIXEL, PROGRESSIVE SCAN, CMOS
- 5.2~114.4 MM@ AF, MOTORIZED ZOOM LENS
- 22X OPTICAL ZOOM
- H.265+, H.265, H.264, MJPEG
- ESI (ELECTRONIC IMAGE STABILIZATION)
- UP TO 150M (492FT) IR DISTANCE
- IR ANTI-REFLECTION WINDOW
- TRIPLE STREAMS
- INTELLIGENT TEMPERATURE CONTROL TECHNOLOGY
- SUPPORT MICRO SD
- IP66



SE25-30X

OUTDOOR IR PTZ CAMERA

- 1/2.8", 2.0 MEGAPIXEL, PROGRESSIVE SCAN, CMOS
- 4.5~135 MM@ AF, MOTORIZED ZOOM LENS
- HD 1920 x 1080
- 30X OPTICAL ZOOM
- H.265+, H.265, H.264, MJPEG
- UP TO 150M (328FT) IR DISTANCE
- IR ANTI-REFLECTION WINDOW
- TRIPLE STREAMS
- SUPPORT MICRO SD
- IP66
- IK10





SE25SW-22X**OUTDOOR IR PTZ CAMERA**

- 1/1.8", 2.0 MEGAPIXEL, PROGRESSIVE SCAN, CMOS
- SONY STARVIS TECHNOLOGY
- 6.5-143 MM, MOTORIZED ZOOM LENS
- HD 1920 x 1080
- 22X OPTICAL ZOOM
- H.265+, H.265, H.264, MJPEG
- UP TO 200M (492FT) IR DISTANCE
- TRUE WDR
- TRIPLE STREAMS
- INTELLIGENT TEMPERATURE CONTROL TECHNOLOGY
- SUPPORT MICRO SD
- IP66






SE25SW-44X**OUTDOOR IR PTZ CAMERA**

- 1/2.8", 2.0 MEGAPIXEL, PROGRESSIVE SCAN, CMOS
- SONY STARVIS TECHNOLOGY
- 5-220 MM, MOTORIZED ZOOM LENS
- HD 1920 x 1080
- 44X OPTICAL ZOOM
- H.265+, H.265, H.264, MJPEG
- UP TO 250M (820FT) IR DISTANCE
- IR ANTI-REFLECTION WINDOW
- TRUE WDR
- TRIPLE STREAMS
- ESI (ELECTRONIC IMAGE STABILIZATION)
- INTELLIGENT TEMPERATURE CONTROL TECHNOLOGY
- ALARM & AUDIO IN/OUT
- SUPPORT MICRO SD
- IP66





SE35-33X**OUTDOOR IR PTZ CAMERA**

- 1/2.8", 3 MEGAPIXEL, PROGRESSIVE SCAN, CMOS
- 4.5-148.5 MM@ AF, MOTORIZED ZOOM LENS
- 33X OPTICAL ZOOM
- H.265+, H.265, H.264, MJPEG
- UP TO 200M (656 FT) IR DISTANCE
- IR ANTI-REFLECTION WINDOW
- TRIPLE STREAMS
- 6KV SURGE PROTECTION
- INTELLIGENT TEMPERATURE CONTROL TECHNOLOGY
- SUPPORT MICRO SD
- ALARM & AUDIO IN/OUT
- IP66





SE85-22X**OUTDOOR IR PTZ CAMERA**

- 1/1.7", 12 MEGAPIXEL, PROGRESSIVE SCAN, CMOS
- 6.5-143 MM@ AF, MOTORIZED ZOOM LENS
- HD 4000 x 3000
- 22X OPTICAL ZOOM
- H.265+, H.265, H.264, MJPEG
- UP TO 250M (492FT) IR DISTANCE
- IR ANTI-REFLECTION WINDOW
- 6KV SURGE PROTECTION
- INTELLIGENT TEMPERATURE CONTROL TECHNOLOGY
- SUPPORT MICRO SD
- ALARM & AUDIO IN/OUT
- IP66

NVR INTEGRATION

System Enhancement



CLOUD UPGRADE

Upgrading IP cameras and configuration setting by just clicking CLOUD UPGRADE on NVR, available human interface and web interface (NVR should be able to access internet)




PLUG N PLAY

Doesn't need a hassle setting to add a camera. Simply connect the camera to the built-in POE port and the image will appear (only on selected model).



H.265 VIDEO COMPRESSION

Reduce the usage of bandwidth and bit rate to enhance the network connection and storage capability without compromising the quality of the image.



LONG DISTANCE TRANSMISSION

Support up to 250m of single cable from camera to NVR.




SD CARD AUTO BACKUP

If the connection between IPC and NVR is interrupted, IPC can store video to SD card. Then after reconnection, IPC can send previous video back to NVR.



RAID DISK MANAGEMENT

Hot-swap from front panel, no need to power off the NVR or open the NVR case, much more convenient. NVR can keep recording even you are changing the hard disk.



n+1 HOT SPARE CONFIGURATION

When the main device fails, the hot spare takes over the operation of the main device and saves the working data. Once the main device is restored to normal status, it takes over the hot spare operation and the data recorded in the hot spare during the failure period are then transferred back to the main device to ensure reliable and consistent data storage.



LINUX OS

NVS4-1P**4 CHANNELS NVR WITH POE+**

- 4 CH INPUT
- PLUG & PLAY
- 4 INDEPENDENT PORT NETWORK INTERFACE
- 1-CH HDMI, I-CH VGA, HDMI AT UP TO 4K(3840X2160) RESOLUTION
- UP TO 8 MEGAPIXEL RESOLUTION RECORDING
- H.265+, H.265, H.264, VIDEO FORMAT
- SUPPORT FOR P2P, UPNP, NTP, DHCP, PPPOE
- 1 SATA 3.5" HDD



LINUX OS

NVS8-1P**8 CHANNELS NVR WITH POE+**

- 8 CH INPUT
- PLUG & PLAY
- 8 INDEPENDENT PORT NETWORK INTERFACE
- 1-CH HDMI, I-CH VGA, HDMI AT UP TO 4K(3840X2160) RESOLUTION
- UP TO 8 MEGAPIXEL RESOLUTION RECORDING
- H.265+, H.265, H.264, VIDEO FORMAT
- SUPPORT FOR P2P, UPNP, NTP, DHCP, PPPOE
- 1 SATA 3.5" HDD



LINUX OS

NVS8-2P**8 CHANNELS NVR WITH POE+**

- 8 CH INPUT
- PLUG & PLAY
- 8 INDEPENDENT PORT NETWORK INTERFACE
- 1-CH HDMI, I-CH VGA, HDMI AT UP TO 4K(3840X2160) RESOLUTION
- UP TO 12 MEGAPIXEL RESOLUTION RECORDING
- H.265+, H.265, H.264, VIDEO FORMAT
- SUPPORT FOR P2P, UPNP, NTP, DHCP, PPPOE
- 2 SATA 3.5" HDD



LINUX OS

NVS16-2P**16 CHANNELS NVR WITH POE+**

- 16 CH INPUT
- PLUG & PLAY
- 16 INDEPENDENT PORT-- NETWORK INTERFACE
- 1-CH HDMI, I-CH VGA, HDMI AT UP TO 4K(3840X2160) RESOLUTION
- UP TO 12 MEGAPIXEL RESOLUTION RECORDING
- H.265+, H.265, H.264, VIDEO FORMAT
- SUPPORT FOR P2P, UPNP, NTP, DHCP, PPPOE
- 2 SATA 3.5" HDD



LINUX OS

NVS16-4P

16 CHANNELS NVR WITH POE+

- 16 CH INPUT
- PLUG & PLAY
- 16 INDEPENDENT PORT NETWORK INTERFACE
- 1-CH HDMI, 1-CH VGA, HDMI AT UP TO 4K(3840X21600) RESOLUTION
- UP TO 12 MEGAPIXEL RESOLUTION RECORDING
- H.265+, H.265, H.264, VIDEO FORMAT
- SUPPORT FOR P2P, UPNP, NTP, DHCP, PPPOE
- 4 SATA 3.5" HDD



LINUX OS

NVS16-2

16 CHANNELS NVR

- 16 CH INPUT
- PLUG & PLAY
- 1-CH HDMI, 1-CH VGA, HDMI2 AT UP TO 4K(3840X21600) RESOLUTION
- UP TO 8 MEGAPIXEL RESOLUTION RECORDING
- H.265+, H.265, H.264, VIDEO FORMAT
- SUPPORT FOR P2P, UPNP, NTP, DHCP, PPPOE
- 2 SATA 3.5" HDD



LINUX OS

NVS32-4

32 CHANNELS NVR

- 32 CH INPUT
- 2-CH HDMI, 1-CH VGA, HDMI2 AT UP TO 4K(3840X21600) RESOLUTION
- UP TO 12 MEGAPIXEL RESOLUTION RECORDING
- H.265+, H.265, H.264, VIDEO FORMAT
- SUPPORT FOR P2P, UPNP, NTP, DHCP, PPPOE
- 4 SATA 3.5" HDD



LINUX OS

NVS32-8

32 CHANNELS NVR

- 32 CH INPUT
- 2-CH HDMI, 1-CH VGA, HDMI2 AT UP TO 4K(3840X21600) RESOLUTION
- UP TO 12 MEGAPIXEL RESOLUTION RECORDING
- H.265, H.264, VIDEO FORMAT
- SUPPORT FOR P2P, UPNP, NTP, DHCP, PPPOE
- SUPPORT N+1 HOT SPARE
- 8 SATA 3.5" HDD



LINUX OS

NVS64-8**64 CHANNELS NVR**

- 64 CH INPUT
- 2-CH HDMI, 1-CH VGA, HDMI2 AT UP TO 4K(3840X2160) RESOLUTION
- UP TO 12 MEGAPIXEL RESOLUTION RECORDING
- H.265+, H.265, H.264, VIDEO FORMAT
- SUPPORT FOR P2P, UPNP, NTP, DHCP, PPPOE
- SUPPORT N+1 HOT SPARE
- 8 SATA 3.5" HDD



LINUX OS

NVS64-8R**64 CHANNELS NVR**

- 64 CH INPUT
- 2-CH HDMI, 1-CH VGA, HDMI2 AT UP TO 4K(3840X2160) RESOLUTION
- UP TO 12 MEGAPIXEL RESOLUTION RECORDING
- H.265+, H.265, H.264, VIDEO FORMAT
- SUPPORT FOR P2P, UPNP, NTP, DHCP, PPPOE
- SUPPORT N+1 HOT SPARE
- RAID 0, 1, 5, 6, 10 HOT SWAP
- 8 SATA 3.5" HDD



LINUX OS

NVS128-16R**128 CHANNELS NVR**

- 128 CH INPUT
- 2-CH HDMI, 1-CH VGA, HDMI2 AT UP TO 4K(3840X2160) RESOLUTION
- UP TO 12 MEGAPIXEL RESOLUTION RECORDING
- H.265+, H.265, H.264, VIDEO FORMAT
- SUPPORT FOR P2P, UPNP, NTP, DHCP, PPPOE
- SUPPORT N+1 HOT SPARE
- RAID 0, 1, 5, 6, 10 HOT SWAP
- SUPPORT 2 MINISAS INTERFACES
- 16 SATA 3.5" HDD



LINUX OS

UMS-1000

UNIFIED MANAGEMENT SERVER

- 1000 DEVICE CONNECTIONS
- UP TO 2000 CHANNELS OF HIGH-DEFINATION NETWORK VIDEO
- UNIFIED MANAGEMENT OF NVR, IPC, RECORDER
- H.265+, H.265, H.264
- REDUNDANT POWER SUPPORT
- LIVE VIEW, PLAYBACK, SEQUENCE, VIDEO WALL, E-MAP, AUDIO & ALARM
- RAID 0, 1, 5, 6, 10, 50, 60 HOT SWAP
- 16 SATA 3.5" HDD



KBJ1500IP

PTZ KEYBOARD CONTROLLER

- LCD SCREEN DISPLAY
- 4 DIMENSIONAL JOYSTICK CONTROL
- BASED ON IP NETWORK
- SUPPORT MULTIPLE USER PERMISSIONS
- MULTIPLE DEVICES CAN CONNECTED
- CONNECTABLE TO CONTROL NVR MENU AND PTZ OPERATIONS



ES-16

16 BAY HDD EXPANSION ENCLOSURE



HDMI-6

6 PORT H.265 DECODING CARD



LINUX OS

XVR5104**4 CHANNELS XVR - HYBRID**

- 4 CH AHD INPUT + 2 CH IP INPUT
- SUPPORT AHD, TVI, CVI, CVBS, IP CAMERAS WITH ADAPTIVE ACCESS
- UP TO 5 MEGAPIXEL RESOLUTION RECORDING
- H.264 VIDEO FORMAT
- 1 CH HDMI OUTPUT AT 4K RESOLUTION
- 1 CH VGA OUTPUT AT 1920X1080
- 1 SATA 3.5" HDD, SUPPORT UP TO 10GB EACH HDD



LINUX OS

XVR5208**8 CHANNELS XVR - HYBRID**


- 8 CH AHD INPUT + 4 CH IP INPUT
- SUPPORT AHD, TVI, CVI, CVBS, IP CAMERAS WITH ADAPTIVE ACCESS
- UP TO 8 MEGAPIXEL RESOLUTION RECORDING
- H.265, H.264 VIDEO FORMAT
- 1 CH HDMI OUTPUT AT 4K RESOLUTION
- 1 CH VGA OUTPUT AT 1920X1080
- 2 SATA 3.5" HDD, SUPPORT UP TO 10GB EACH HDD



LINUX OS

XVR5216**16 CHANNELS XVR - HYBRID**

- 16 CH AHD INPUT + 8 CH IP INPUT
- SUPPORT AHD, TVI, CVI, CVBS, IP CAMERAS WITH ADAPTIVE ACCESS
- UP TO 5 MEGAPIXEL RESOLUTION RECORDING
- H.265, H.264 VIDEO FORMAT
- 1 CH HDMI OUTPUT AT 4K RESOLUTION
- 1 CH VGA OUTPUT AT 1920X1080
- 2 SATA 3.5" HDD, SUPPORT UP TO 10GB EACH HDD

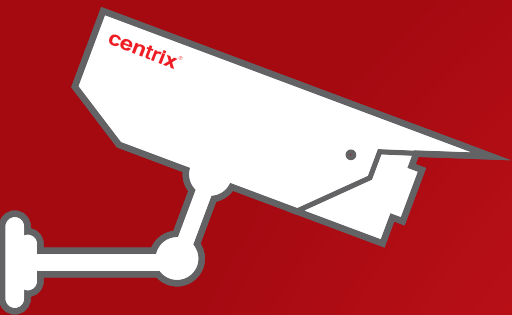

24 HOUR CCTV SURVEILLANCE



Retail



Transportation



Industrial



Education



Banking



Hospitality



Government



Residential

sense of security™